


DMAS7TM - LiteTM **GigE** VISION


Motion Capture Suite

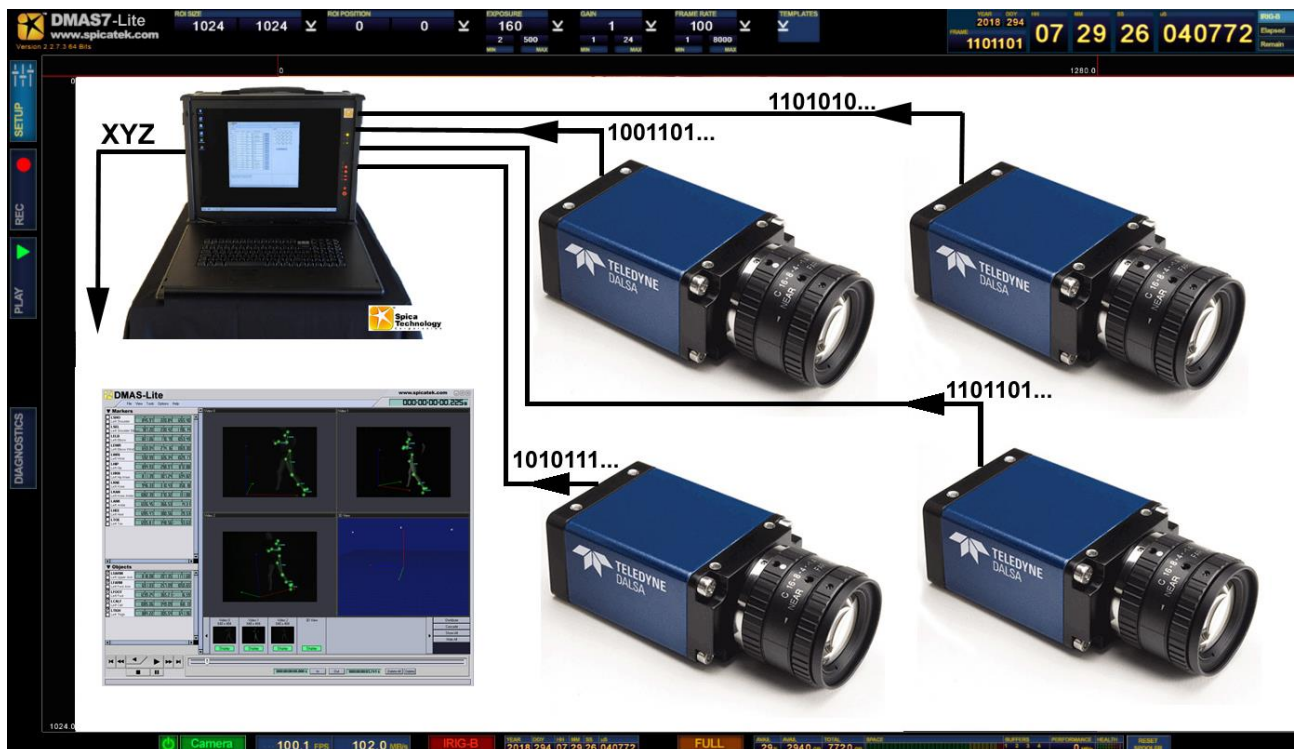

Available in 1, 2 and 4 GigE Vision camera system configurations

Standard commercial off the shelf (COTS) hardware

- Video Options:
 - 300 Hz 640 x 480
 - 110 Hz 1024 x 1024
 - 60 Hz 1600 x 1200
 - 50 Hz 2048 x 1088
- Uncompressed synchronized video
- Native or optional IRIG-B timecode
- Static or dynamic calibration
- Lens distortion compensation
- Track any number of markers
- Automatic tracking with 3D data reconstruction
- Subpixel marker tracking, Object tracking
- Record video to disk or RAM
- Turnkey capture/analysis templates
- Track white or black markers
- Comprehensive multimedia reporting tools with integrated video

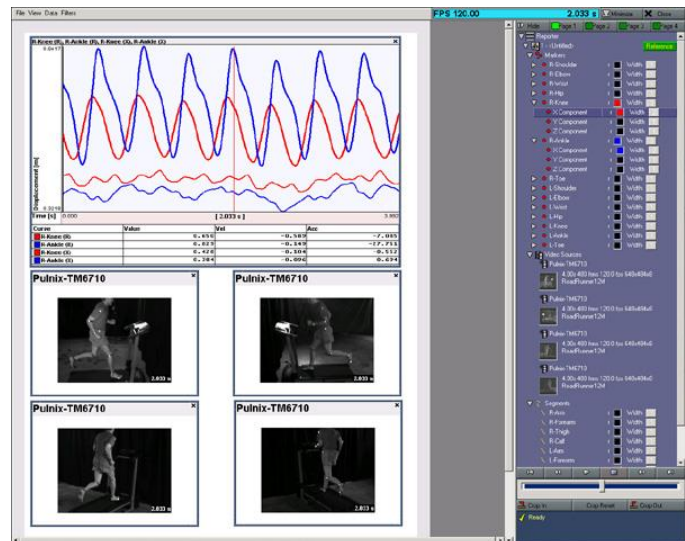

Challenge us with your requirementsTM



<http://www.spicatek.com>

808-280-8659 jmb@spicatek.com