


DMAS7TM Visual Hulls

High Speed Volumetric Capture


for

CoaXPress[®]

High Speed Vision

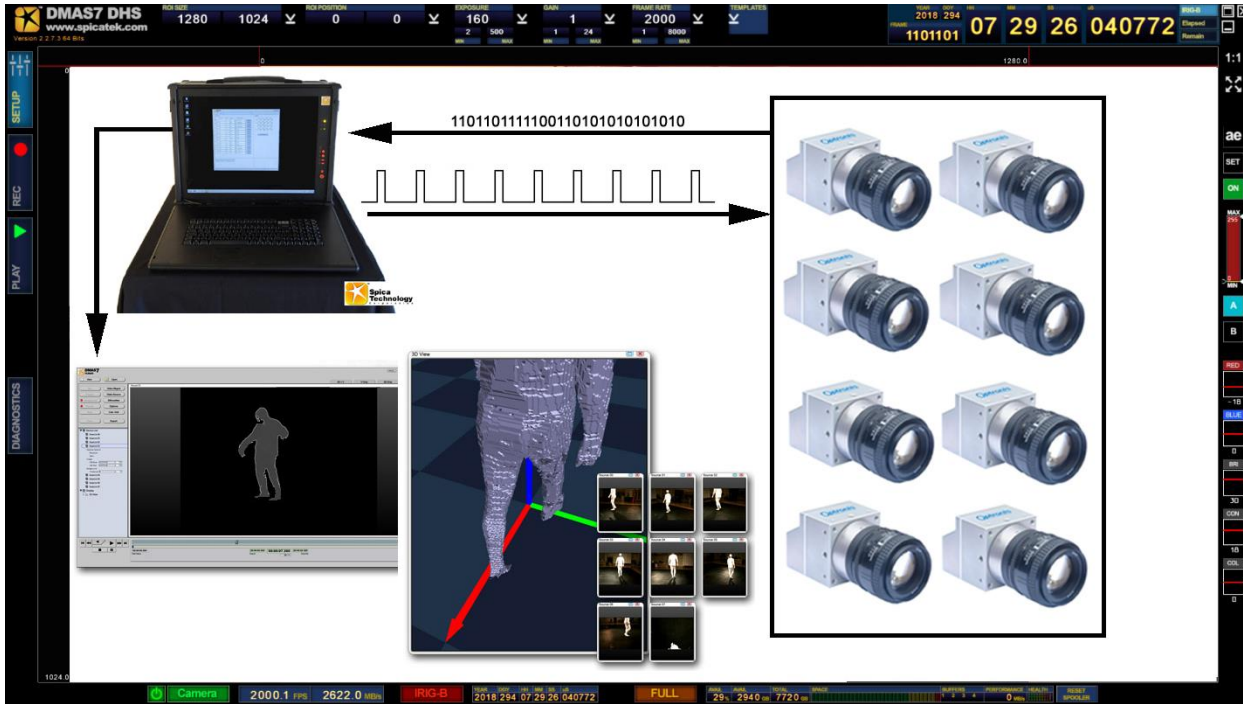

- Video Options: 100 - 2000 Hz
8 bit full HD 1920 x 1080
- Available in 8, 12 or 16 camera configurations
- Uncompressed synchronized video acquisition
- Native or optional military rated IRIG-B timecode
- Auto exposure
- Static or dynamic calibration
- All cameras TTL synchronized
- 32 channels of peripheral signal capture
- Volumes with vertex and normal data
- Export in point cloud, DXF or IGES format

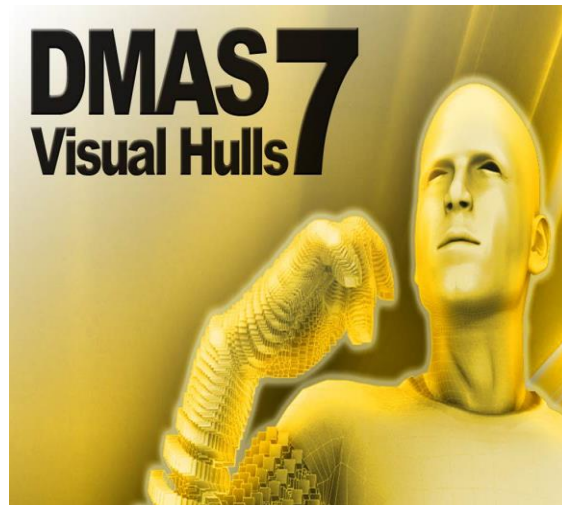

Challenge us with your requirementsTM



<http://www.spicatek.com>

808-280-8659 jmb@spicatek.com